


NORMAL TRAFFIC PATTERN ESKV DYNAMIC SE-VPI

Parallel distance: 700-1000 m

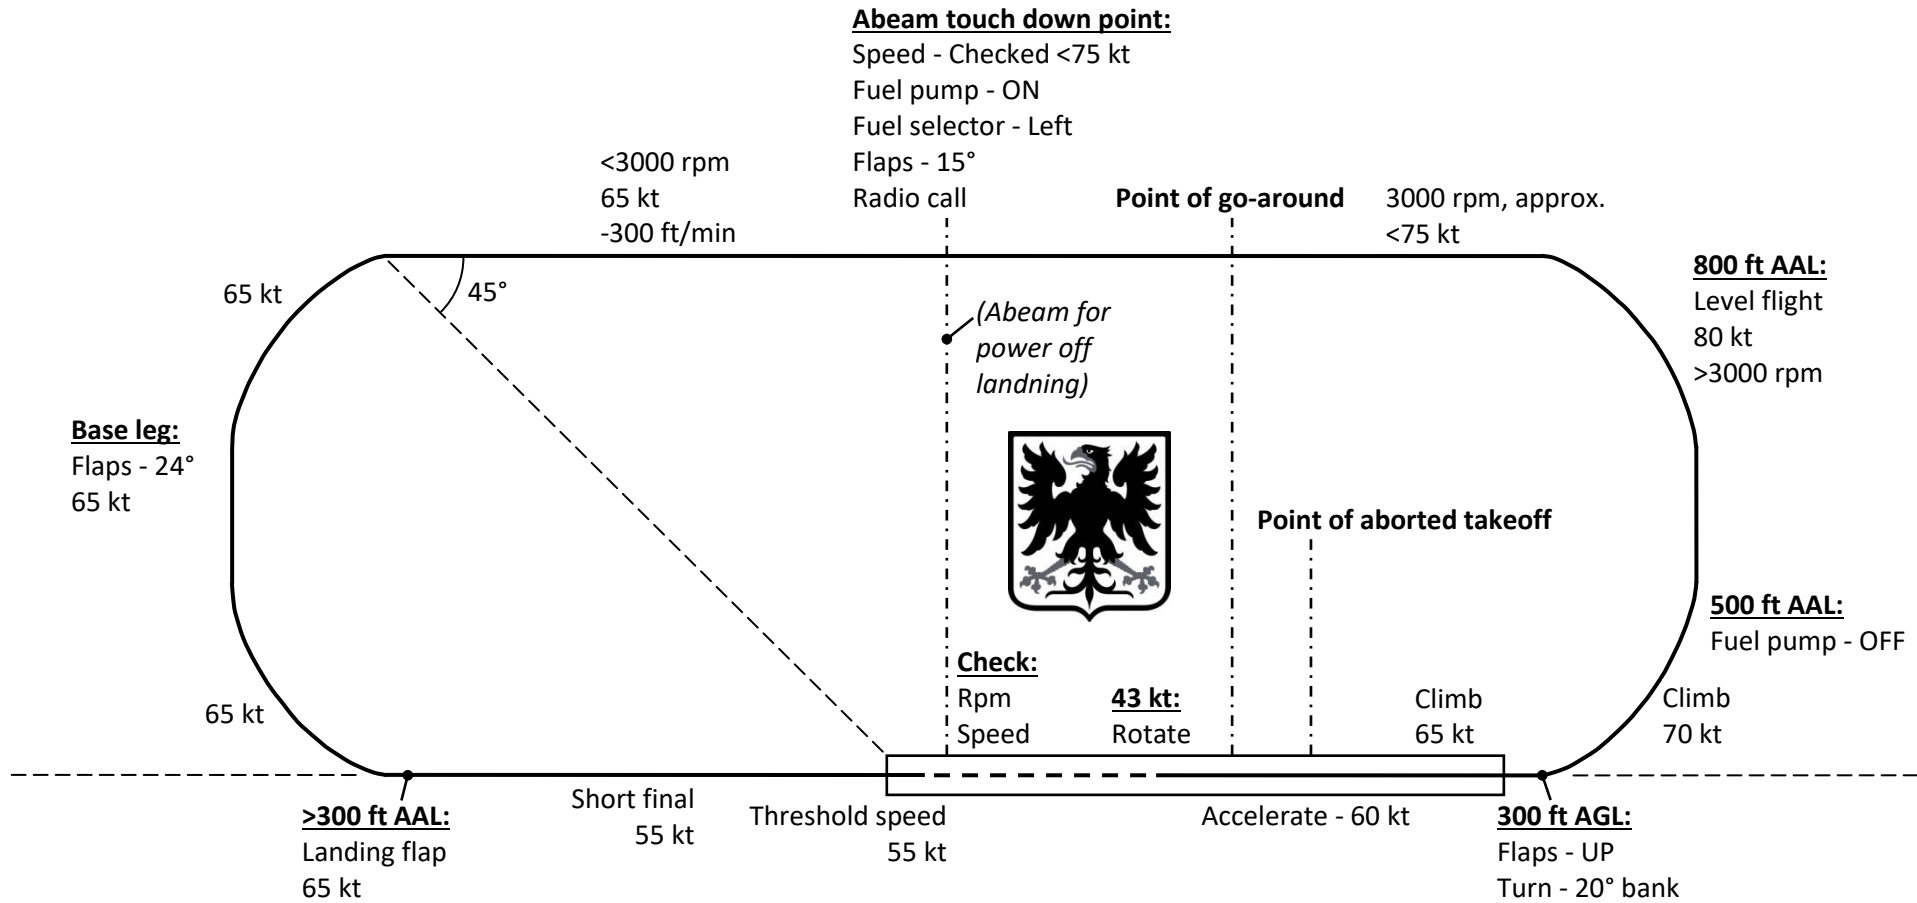

Power off landing:

Abeam at 1000 ft AAL - Idle
Flaps - 15°
Speed for best glide - 65 kt

.....
Landing assured: Landning flap >100 ft AAL

Go-around:

Full power
Level flight
Flaps - 15°
Climb - 65 kt

Touch and go:

Flaps - 15°
Trim - Neutral
Full power

Max crosswind: 18 kt

Flaps - 15°
Threshold speed - 65 kt

Flight planning:

Cruise power (65%) 4800 rpm
Fuel consumption 14 l/h
Speed 105 kt

<u>EMERGENCY CHECKLIST</u>	
Fly the Aircraft	65 kt
Fuel pump	ON
Fuel selector	Left
Choke	Closed
"Magnetoes"	Best running
Restart	Attempt