


Speeds in mph

### NORMAL TRAFFIC PATTERN ESKV PA28 SE-GAN

Parallel distance: 700-1000 m

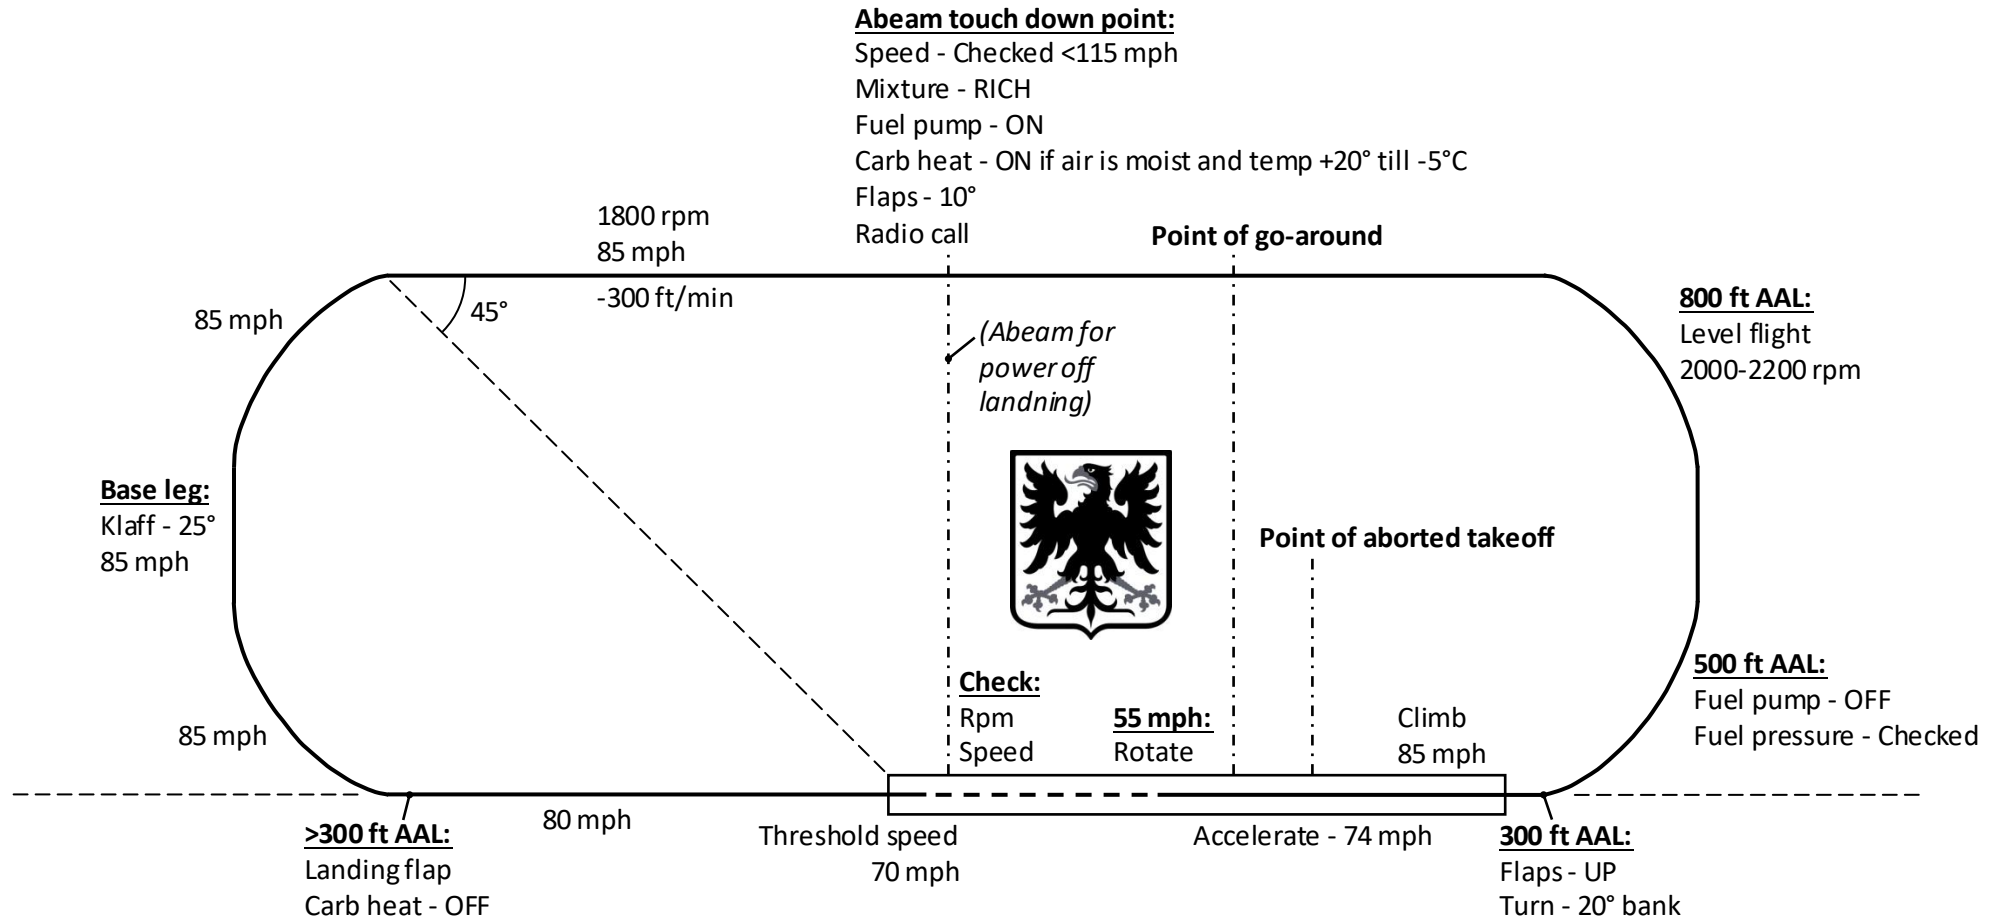

**Abeam touch down point:**

- Speed - Checked <115 mph
- Mixture - RICH
- Fuel pump - ON
- Carb heat - ON if air is moist and temp +20° till -5°C
- Flaps - 10°
- Radio call

**Base leg:**  
Klaff - 25°  
85 mph

**>300 ft AAL:**

- Landing flap
- Carb heat - OFF
- 80 mph
- If gusty winds or >15 kt - Flaps 25°

**Power off landing:**

- Abeam at 1000 ft AAL - Idle
- Flaps - 10°
- Speed for best glide - 85 mph
- Landing assured: Landing flap >100 ft AAL

**Go-around:**

- Full power
- Level flight
- Flaps - 10°
- Climb - 85 mph

**Touch and go:**

- Flaps - 10°
- Full power

**Max crosswind:**

17 kt

**Flight planning:**

- Cruise power (65%) 2350 rpm
- Fuel consumption 38 l/h
- Speed 105 kt

**EMERGENCY CHECKLIST**

Fly the Aircraft	85 mph
Fuel selector	Fullest tank
Mixture	RICH
Fuel pump	ON
Carb heat	ON
Magnetoes	Best running
Primer	Locked